

Data teknis


Fluke TPS FLEX 18 Flexible Current Probe



Spesifikasi: Fluke TPS FLEX 18 Flexible Current Probe

General Specifications	
Measuring Range selectable per software	1 A to 100 A
	5 A to 500 A
Peak current for sinusoidal currents	240 A
	1350 A
Intrinsic error	1%
Frequency Range	45 Hz to 3.0 kHz
Operating Voltage	300 V CAT IV
Phase Error	0.5°
Jaw Opening	45 cm length
	2 m cable
Errors in % of measuring range at 23°C ± 2 K; 74°F ± 2 K, for 48 to 65 Hz Phase angle error at nominal current I _{max} maximum current without time limit (for AC and DC shunts)	

Model

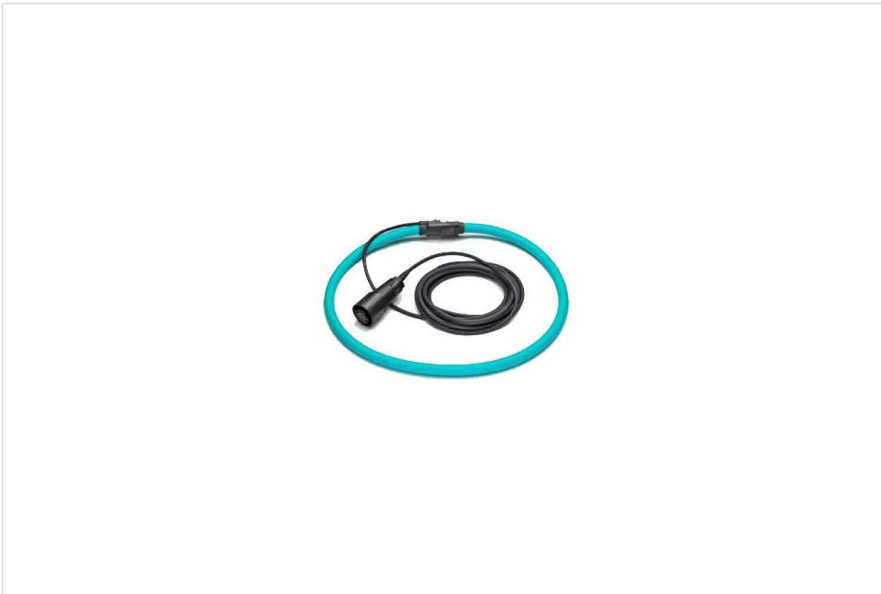

Fluke TPS FLEX 18

Flexible Current Probe

Fluke. *Memastikan aktivitas Anda terus berjalan dan beroperasi.*

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

www.fluke.com

BUT. FLUKE SOUTH EAST ASIA PTE LTD

Menera Satu Sentra Kelapa Gading #06-05

Jl. Bulevar Kelapa Gading Kav. LA# No. 1

Summarecon Kelapa Gading

Jakarta Utara 14240

Indonesia

Tel: +62 21 2938 5922

Email: info.asean@fluke.com

www.fluke.com/id

©2021 Fluke Corporation. Specifications subject to change without notice.

12/2021

Modification of this document is not permitted without written permission from Fluke Corporation.