

Tekniska data

Fluke i2000PQ4 Current Clamp, 4-pack



Produktöversikt: Fluke i2000PQ4 Current Clamp, 4-pack

Very large, flexible AC current clamps

A pack of 4 pieces of the i2000 current clamp, to be used for high current measurements. The Flex clamp fits around bus bars and large or hard-to-reach conductors. This 4-pack is perfect for use with 3-phase tools such as the Fluke 433 or Fluke 434.


- This 4-pack is perfect for use with 3-phase tools such as the Fluke 433 or Fluke 434
- Each clamp has two ranges: 200 A & 2000 A, 1 or 10 mV/ Amp output
- Ideal for current measurement on thick and hard to reach conductors without breaking the circuit
- Maximum conductor Ø160 mm
- CAT III 600 V safety rating

Specifikationer: Fluke i2000PQ4 Current Clamp, 4-pack

Specifications	
Nominal current range	200 A 2000 A
Continuous current range	2 A - 200 A 20 A - 2000 A

Maximum non-destructive current	4000 A
Lowest measurable current	2 A
Basic accuracy	1% F.S. (48-65 Hz) (% reading + floorspec)
Useable frequency	1 Hz - 20 kHz
Output level(s)	10 mV/A 1 mV/A
Safety Specifications	
Safety	CAT III, 600 V
Maximum voltage	600 V AC
Mechanical and General Specifications	
Warranty	1 year
Battery life	9 V, >100 h.
Maximum conductor diameter	160 mm
Output cable length	2.3 m
BNC adapter	Yes
BNC to banana adapter included	Yes

Modeller

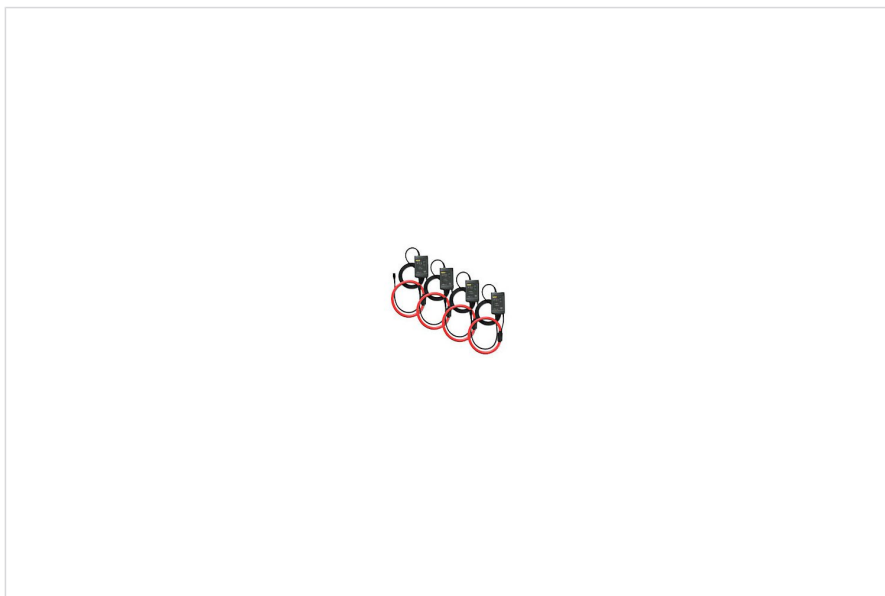

i2000FLEXPQ4

Fluke i2000PQ4 Current Clamp, 4-pack

Fluke. *Keeping your world up and running.*®

Fluke Sverige AB
c/o Gilbarco Veeder-Root
Johannesfredsvägen 11 A
16869 Bromma
Tel: 08 5663 7400
E-mail: cs.se@fluke.com
www.fluke.se

©2021 Fluke Corporation. Med ensamrätt. Data kan komma att ändras utan föregående meddelande. 12/2021

Ändringar får inte göras i det här dokumentet utan skriftligt medgivande från Fluke Corporation.