



TECHNICAL DATA

# Fluke 5627A-9-J Industrial RTD Probe

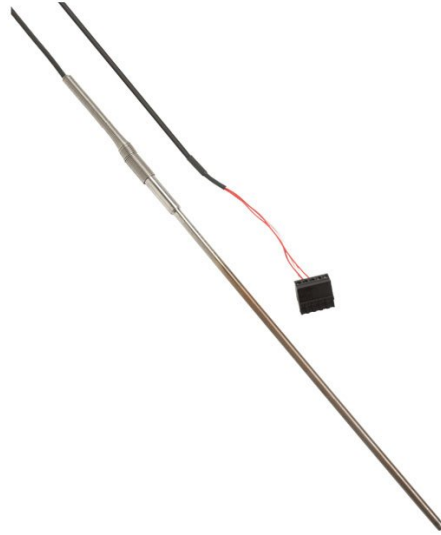

## Ordering information

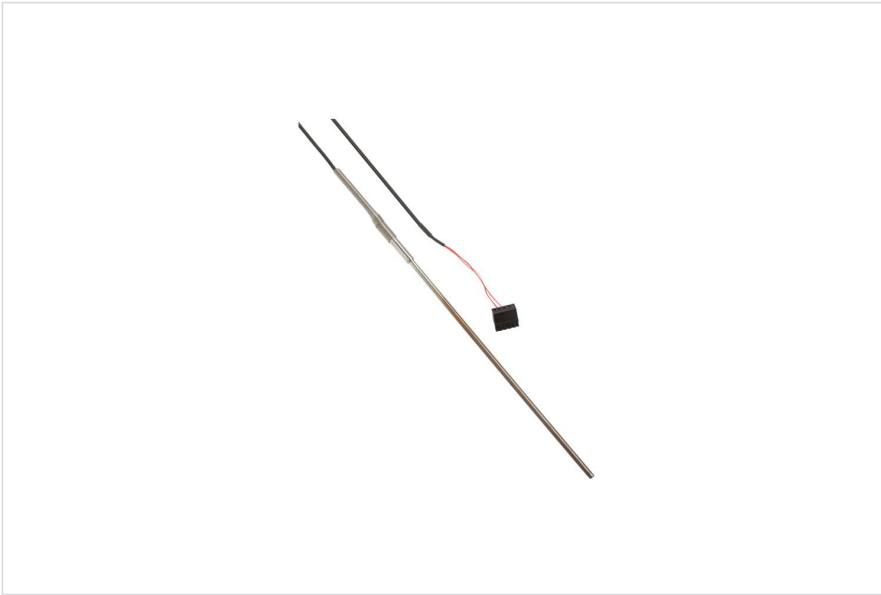

### **Fluke 5627A-9-J**

Industrial RTD Probe

---

Secondary PRT, 229 mm x 4.7 mm (9 x 3/16 in), -200 °C to 300 °C  
J suffix = banana plug termination

---

**Fluke.** *Keeping your world up and running.*®

**Fluke Corporation**

PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa +31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

**Fluke Electronics (Malaysia) Sdn Bhd**

Suite D-3A-4, Block D

SouthGage Commercial Centre, No2

Jalan Dua Off Jln Chan Sow Lin

55200 KL

Malaysia

Email: [info.asean@fluke.com](mailto:info.asean@fluke.com)

[www.fluke.com/my](http://www.fluke.com/my)

©2021 Fluke Corporation. Specifications subject to change without notice.

12/2021

**Modification of this document is not permitted without written permission from Fluke Corporation.**