


# Fluke STL120-III Shielded Test Leads Set

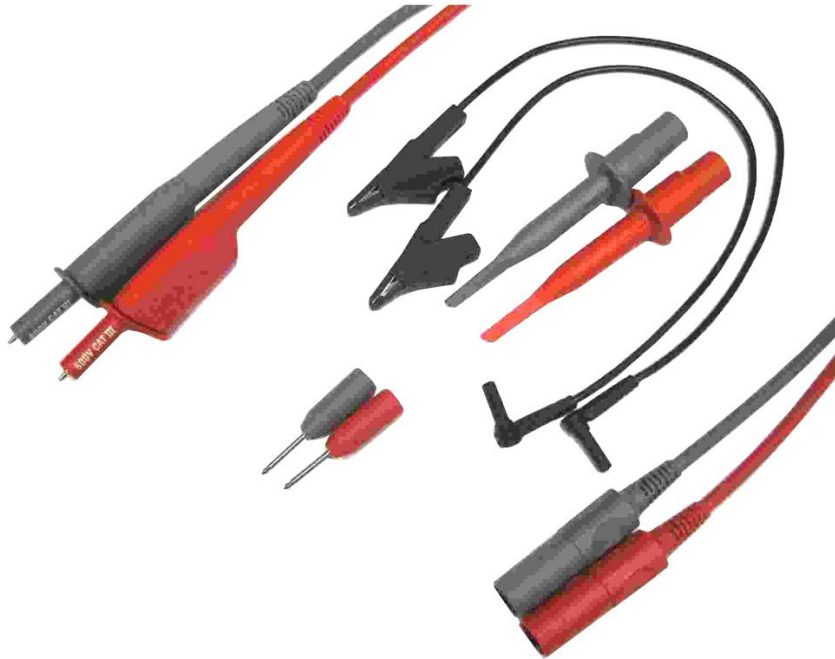

## Fitur utama

- Bandwidth: 12,5 MHz
- Maximum Signal Voltage: 600V rms. CAT III per IEC 61010-031:2008
- Maximum Voltage to Ground: 600V rms. CAT III per IEC 61010-031:2008
- Maximum Current: 1A
- 2mm add-on testpin: 600V CAT II per IEC 61010-031:2008
- Length: 1.2m (48)

## Ikhtisar Produk: Fluke STL120-III Shielded Test Leads Set

Set of two (one red, one gray) double insulated silicone shielded test leads for noise free measurements. Specially designed for use with the Fluke ScopeMeter 120 Series. Compatible with AC120 Alligator Clips and HC120 Hook Clips. Safety designed ground leads included. Integral strain relieve and extra hard probe tips provide extra long service life. features safety designed shrouded plugs and notched tip to prevent probe from sliding.

## Spesifikasi: Fluke STL120-III Shielded Test Leads Set

| Specifications         |  |
|------------------------|--|
| Bandwidth              | 12,5 MHz                                 |
| Maximum signal voltage | 600 V rms CAT III per IEC 61010-031:2008 |

|                           |  |
|---------------------------|--|
| Maximum voltage to ground | 600 V rms CAT III per IEC 61010-031:2008 |
| Maximum vcurrent          | 1 A                                      |
| 2 mm add-on testpin       | 600 V CAT II per IEC 61010-031:2008      |
| Length                    | 1.2 m (48)                               |

## Model



### **Fluke STL120 III**

Shielded Test Leads Set

---

**Fluke.** *Memastikan aktivitas Anda terus berjalan dan beroperasi.*

**Fluke Corporation**

PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

[www.fluke.com](http://www.fluke.com)

**BUT. FLUKE SOUTH EAST ASIA PTE LTD**

Menera Satu Sentra Kelapa Gading #06-05

Jl. Bulevar Kelapa Gading Kav. LA# No. 1

Summarecon Kelapa Gading

Jakarta Utara 14240

Indonesia

Tel: +62 21 2938 5922

Email: [info.asean@fluke.com](mailto:info.asean@fluke.com)

[www.fluke.com/id](http://www.fluke.com/id)

©2021 Fluke Corporation. Specifications subject to change without notice.

11/2021

**Modification of this document is not permitted without written permission from Fluke Corporation.**