

TECHNICAL DATA

Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)




Key features

- Cable length is 1.5 m
- Maximum Signal Voltage: 300 V rms
- Maximum Voltage to Ground: 600 V rms. CAT III per IEC 61010-031
- BB120 Shielded Banana to BNC Adapter is required to adapt to ScopeMeter 120 Series shielded banana jack inputs

Product overview: Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)

Each set consists of three black cables with colored BNC male connectors (red, gray and black) for easy identification.

Ordering information

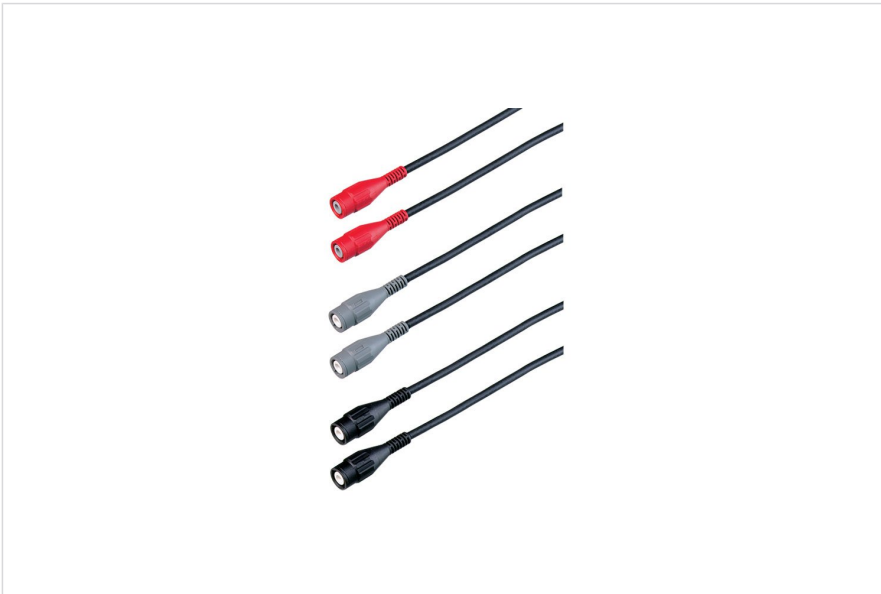

Fluke PM9091

50 Ohm Coaxial BNC cable set (3 x 1.5m)

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Europe/M-East/Africa
+31 (0)40 267 5100
In Canada (800)-36-FLUKE
From other countries +1 (425) 446-5500
www.fluke.com/en-th

©2022 Fluke Corporation. Specifications subject to
change without notice.
01/2022

**Modification of this document is not permitted
without written permission from Fluke Corporation.**