

## TECHNICAL DATA

# Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)




## Key features

- Cable length is 1.5 m
- Maximum Signal Voltage: 300 V rms
- Maximum Voltage to Ground: 600 V rms. CAT III per IEC 61010-031
- BB120 Shielded Banana to BNC Adapter is required to adapt to ScopeMeter 120 Series shielded banana jack inputs

## Product overview: Fluke PM9091/001 50 Ohm Coaxial BNC cable set (3 x 1.5m)

Each set consists of three black cables with colored BNC male connectors (red, gray and black) for easy identification.

## Ordering information

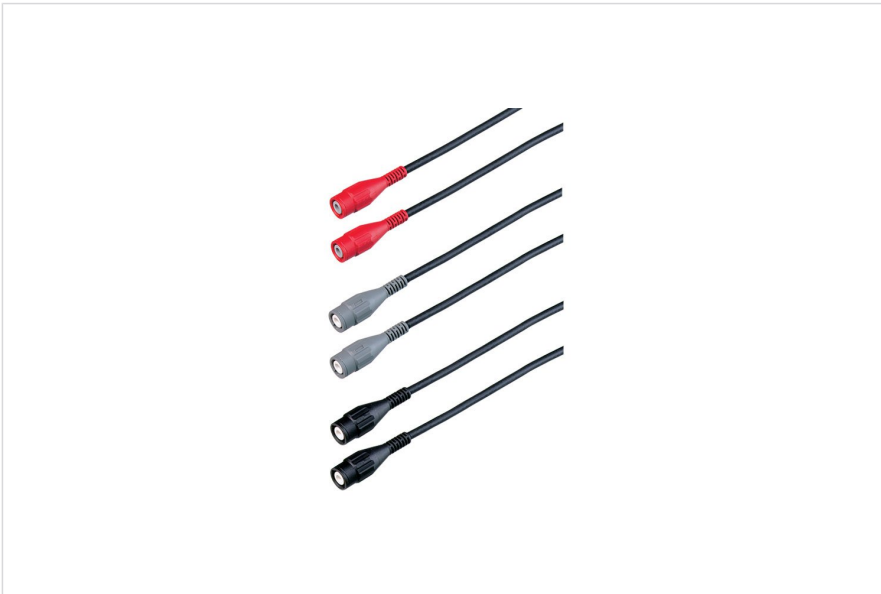

### **Fluke PM9091**

50 Ohm Coaxial BNC cable set (3 x 1.5m)

---

**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**  
In the U.S.A. (800) 443-5853  
In Canada (800) 36-FLUKE  
From other countries +1 (425) 446-5500  
[www.fluke.com](http://www.fluke.com)

©2021 Fluke Corporation.  
Specifications subject to change without notice.  
12/2021

**Modification of this document is not permitted  
without written permission from Fluke Corporation.**