

TECHNICAL DATA

Fluke 419D Laser Distance Meter



Key features

- Versatile laser distance meter that instantly measures up to 80 m (260 ft.) with one-button point-and-click operation
- Quickly calculates area (square feet/meters) and volume
- Offers enhanced Pythagoras calculation for determining distance indirectly from three other measurements
- Provides easy to-use addition and subtraction function
- Provides audible keypad feedback

Product overview: Fluke 419D Laser Distance Meter

Fluke 419D Laser Distance Meter extends your reach to 80 meters with high accuracy

You can use the Fluke 419D laser distance meter to measure up to 80 m (260 ft.), accurate to + 1 mm. No scales to interpret or misread. The extra bright laser makes it easy to target even at long distances. The 419D will help you save time and reduce errors with enhanced features like storage for 20 complete displays, indirect Pythagoras distance calculations, and the tripod mode for stable, long-distance measurements. And, you'll be able to see the results more easily on the backlit display. No matter your job, the 419D laser distance meter provides accurate long distance measurements to help you do the work of two people on your own.

Other helpful features:

- Improves visibility with backlit, three-line display
- Offers minimum/maximum tracking to measure the room's diagonal and horizontal distance from a stable measurement point
- Offers battery life of 5000 measurements with automatic shut-off feature
- Allows mounting on a tripod for stable long distance measurements


- Includes stake out function for marking off defined measured lengths
- Offers improved visibility with three-line, backlit display
- Stores the last twenty 20 complete displays for quick recall
- Provides strong environmental protection with IP54 (water spray and dust proof) sealing
- Powered by two AAA batteries

Specifications: Fluke 419D Laser Distance Meter

Distance Measurement	
Typical measuring tolerance ¹	±1.0 mm ³
Maximum measuring tolerance ²	±2.0 mm ³
Range at Leica Target Plate GZM26	80 m / 260 ft
Typical range ¹	80 m / 260 ft
Range at unfavorable condition ⁴	60 m / 195 ft
Smallest unit displayed	6 / 30 / 60 mm (10 / 50 / 100 m)
Ø Laser point at distances	6 / 30 / 60 mm (10 / 50 / 100 m)
Tilt measurement	
Measuring tolerance to laser beam ⁵	No
Measuring tolerance to housing ⁵	No
Range	No
General	
Laser class	2
Laser type	635 nm, < 1 mW
Protection class	IP54
Automatic laser off	After 90 seconds
Automatic power off	After 180 seconds
Battery life (2 x AAA) 1.5 V NEDA 24A/IEC LR03	Up to 5,000 measurements
Size (L x W x D)	127 x 56 x 33 mm
Weight (with batteries)	153 g
Temperature range Storage operation	-25°C to +70°C (-13°F to +158°F)
	-10°C to +50°C (14°F to +122°F)
Calibration cycle	Not applicable
Maximum altitude	3000 m
Maximum relative humidity	85% at 20°F to 120°F (-7°C to 50°C)
Safety	IEC Standard No. 61010-1:2001
	EN60825-1:2007 (Class II)

EMC	EN 55022:2010
	EN 61000-4-3:2010
	EN 61000-4-8:2010
<p>1. Applies for 100% target reflectivity (white painted wall), low background illumination, 25°C.</p> <p>2. Applies for 10 to 500% target reflectivity, high background illumination, -10°C to +50°C.</p> <p>3. Tolerances apply from 0.05 m to 10 m with a confidence level of 95%. The maximum tolerance may deteriorate to 0.1 mm/m between 10 m to 30 m and to 0.15 mm/m for distances above 30 m.</p> <p>4. Applies for 100% target reflectivity, background illumination between 10'000 lux and 30'000 lux.</p> <p>5. After user calibration. Additional angle related deviation of $\pm 0.01^\circ$ per degree up to $\pm 45^\circ$ in each quadrant. Applies at room temperature. For the whole operating temperature range the maximum deviation increases by $\pm 0.1^\circ$.</p>	

Ordering information

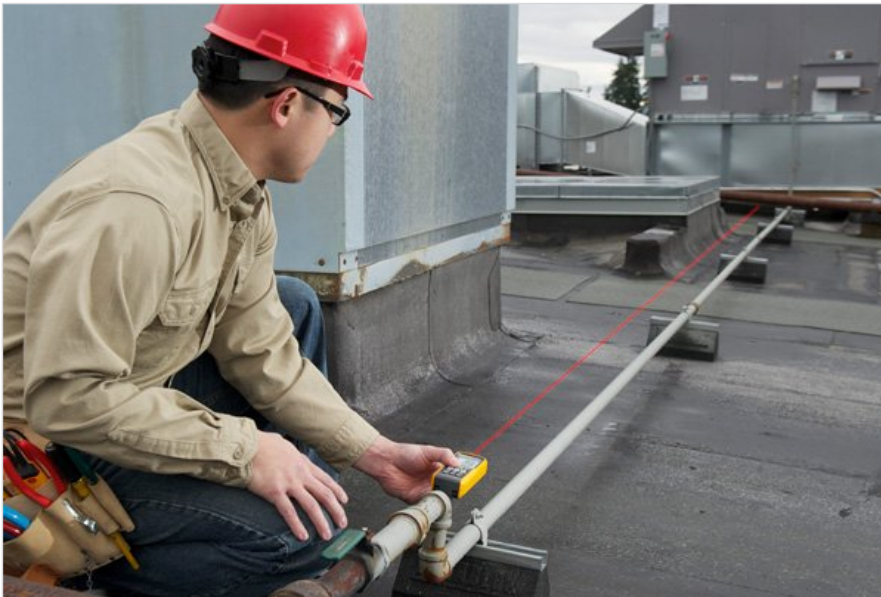

Fluke 419D

Fluke 419D Laser Distance Meter

Includes:

- Two AAA batteries
 - Users manual on CD
 - Quick reference guide
 - Vinyl carrying pouch
 - Lanyard
 - Three-year warranty
-

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Australia
Unit 26, 7 Anella Ave
Castle Hill, NSW 2154 Australia
Phone: 61 2 8850-3333
www.fluke.com.au

©2022 Fluke Corporation. All rights reserved.
Specifications subject to change without notice.
01/2022

**Modification of this document is not permitted
without written permission from Fluke Corporation.**